


## Schlauchnippel aus PP

- heißwasserbeständig bis 90 °C
- Brandverhalten: Geprüft nach DIN 4102-B2, EN 13501-1-E, EN 11925-2.



DN 50 8,2-26,5 mm Art. Nr. 50011SN

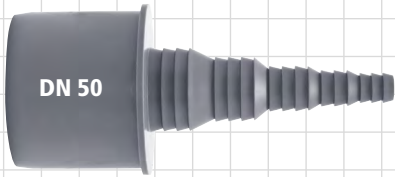

DN 40 8,2-26,5 mm Art. Nr. 50013SN



DN 32 8,5-26,5 mm Art. Nr. 50015SN


### Kondensat-Set



Art. Nr. 50012KS

## Doppel-Schlauchnippel aus PP

DN 50 8,3-20,5 mm Art. Nr. 50020SN

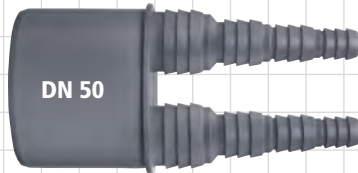

Anschraubmuffe DN 50 grau

## Schlauchwinkel aus PP



DN 50 18-21,7 mm  
Art. Nr. 50010SW



DN 40 18-21,7 mm  
Art. Nr. 50040SW



Wasch- und Spülmaschinen



DN 40 8,5-26,6 mm  
Art. Nr. 50016SW




Einfach passend abschneiden:

## Pumpenwinkel Universal aus PVC

1 1/4" AG, 8,3-33,5 mm, PN2 60°C

Art. Nr. 50018SW

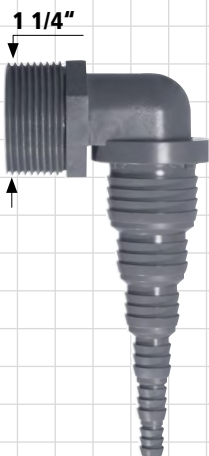

Optimaler Übergang vom Schlauch zum Abflussrohr.